





# CHEMPRO TECHNOLOGY (M) SDN BHD


Technical Data	
Machine capacity	268 racks; 6700 dishes / hr.
Wash pump power	1.5 kW (2 HP) + 1.5 kW (2 HP)
Door opening height	450 mm
Tank heater	7.5 kW + 7.5 kW
Booster heater	9 kW x 4
Rinse usage	2 L / rack
Auto fill	YES
Auto door sensor	YES
Auto energy saving system	YES
Net weight	347 kg
Dimension	W1652 x D725 x H1890
Electrical loading	40 kW (60 A)
Power supply	415V / 50Hz / 3 Phase




ASCO solenoid valve provides reliability

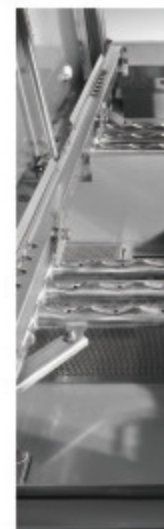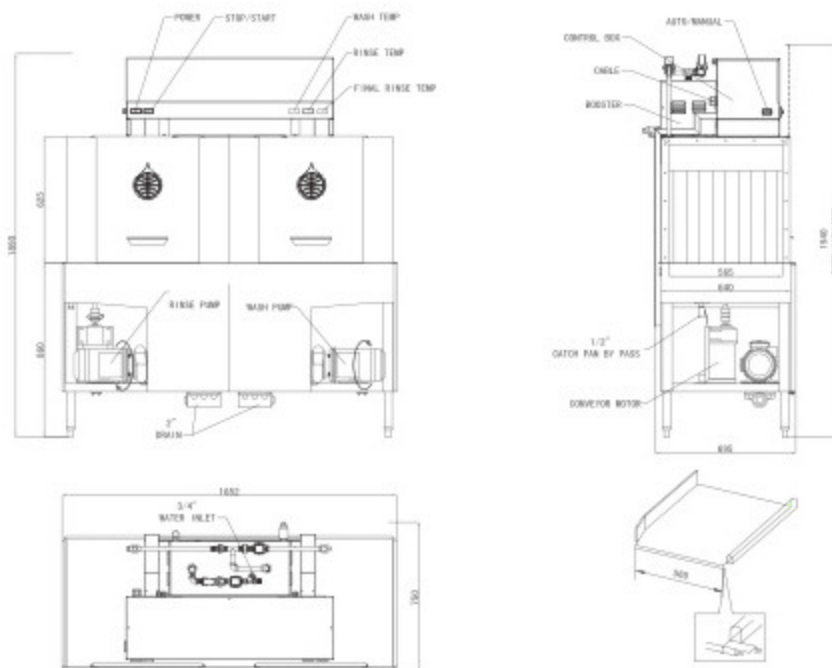

Debossed anti-clip provide powerful performance.

Characteristics		
	Energy saving design	⇒ Save cost
	Automatic operating system	⇒ Simple to use
	High efficient performance	⇒ Reduce labor
	All stainless steel construction	⇒ Durable and reduce down time
	Powerful washing & sanitizing	⇒ Improve hygiene image

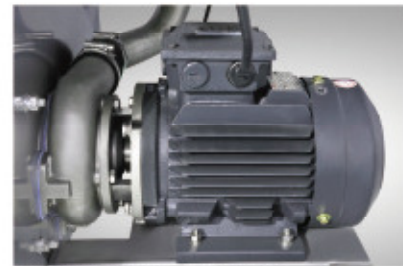

ABE pump motor & alloy impeller guarantee maximum durability.



Reliable mechanical type thermal control and temperature gauges.



Newest "Boal- shaped selector switches"; fully automatic mechanical circuit control.